



# RB551V-30

## SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER


Reverse Voltage - 30 Volts      Forward Current - 500 mAmpere

### FEATURES

- Low Turn-on Voltage
- Fast Switching
- Ultra-small surface mount package.
- PN Junction Guard Ring for Transient and ESD Protection

### MECHANICAL DATA

- Case: SOD-323, Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 0.004 grams (approx.)

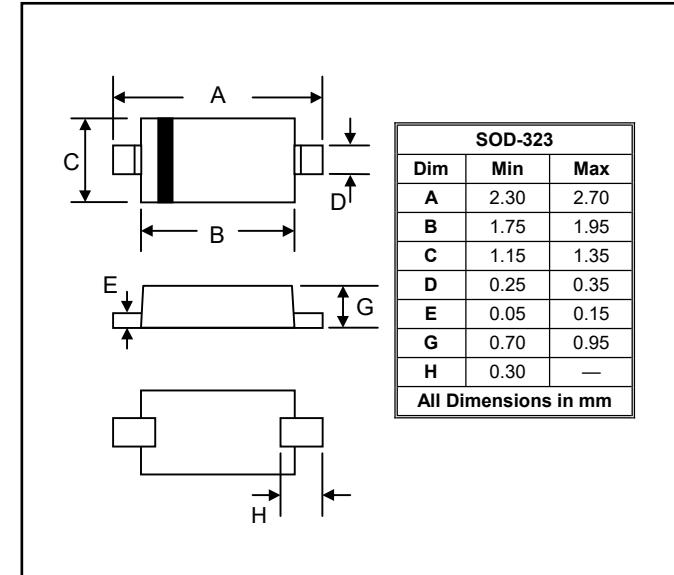

### Maximum Ratings @ $T_A=25^\circ\text{C}$ unless otherwise specified

Parameter	Symbol	Value	Unit
Peak Reverse Voltage	$V_{RM}$	30	V
Reverse Voltage	$V_R$	20	V
Mean Rectifying Current	$I_o$	0.5	A
Peak Forward Surge Current (60 Hz for 1 Cyc.)	$I_{FSM}$	2	A
Operating Junction Temperature Range	$T_j$	-55 to +125	°C
Storage Temperature Range	$T_s$	-55 to +150	°C

### Electrical Characteristics @ $T_A=25^\circ\text{C}$ unless otherwise specified

Parameter	Symbol	Typ.	Max.	Unit
Forward Voltage at $I_F = 100 \text{ mA}$ at $I_F = 500 \text{ mA}$	$V_F$ $V_F$	- -	0.36 0.47	V V
Reverse Current at $V_R = 20 \text{ V}$	$I_R$	-	100	µA
Capacitance Between Terminals at $V_R = 10 \text{ V}$ , $f = 1 \text{ MHz}$	$C_T$	20	-	pF



# RB551V-30

## RATINGS AND CHARACTERISTIC CURVES

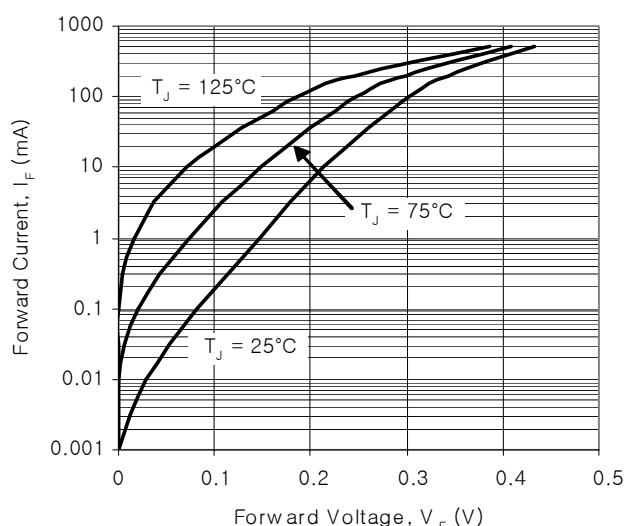


Fig. 1. Typical Forward Characteristics

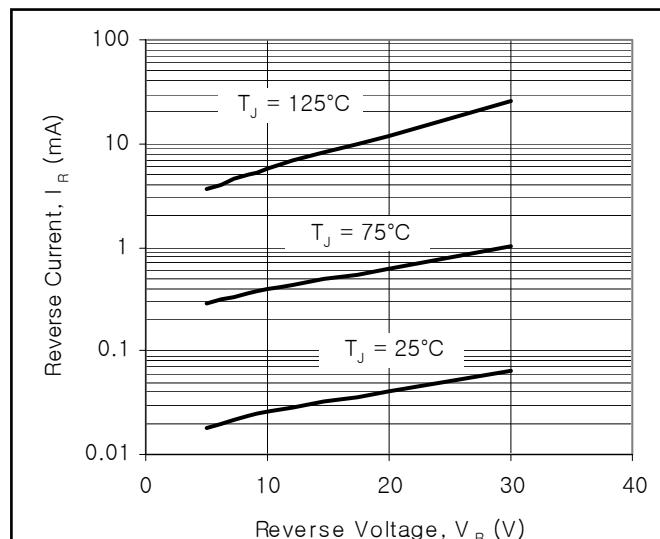


Fig. 2. Typical Reverse Characteristics

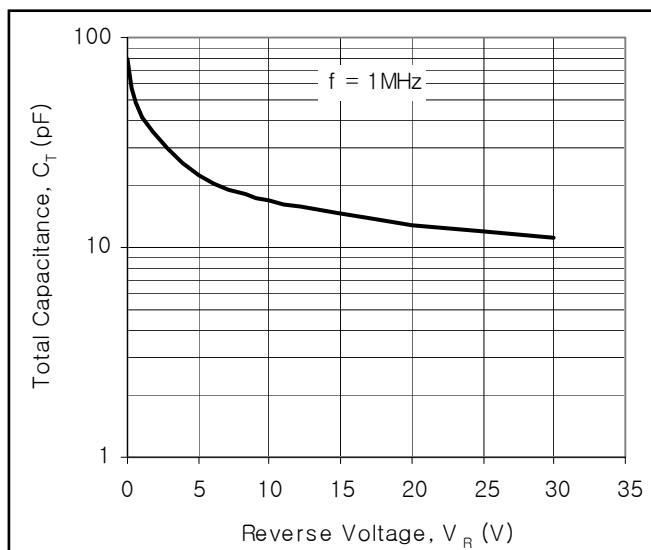


Fig. 3. Typical Capacitance